

Walcom[®]

SPRAYGUNS



DISTRIBUTED BY



flpgroup.co.uk



Exceeding expectations everyday...

- **Honest friendly team** to service and solve all issues
- **Dedicated area account manager** enabling streamline correspondence
- **Face to face visits** For business development
- **On-site sales technician** For professional case resolutions
- **Orders dispatched 5 days a week** giving customers the highest flexibility
- **Large stock holdings** on key product lines for reliable supply
- **Low carriage paid order value** offering easier stocking levels
- **Next day delivery service** on orders placed before 3pm*



GENESI CARBONIO
360 HTE BASE

4



GENESI CARBONIO
360 HTE CLEAR

5



SLIM KOMBAT HTE

6



EGO MINI SPRAY
GUN-HTE

7



SPRAYGUN
ACCESSORIES

8



SPRAYGUN CLEANERS

10



BLOW GUNS

12



PAINT DRYING

14



FILTERS

16



COUPLINGS & PLUGS

19

Genesi Carbonio 360

HTE Base

CUPS AVAILABLE

- Black UV (as standard)
- White
- Aluminium

NOZZLE

Ultra lightweight air cap made from carbon fiber and aluminium.

FAN PATTERN CONTROL

Completely open.

MATERIAL FLOW CONTROL

3-3.5 turn backward from close for waterborne, it may need to be adjusted based on temperature, humidity and painter speed. The material flow is very precise and can be adjusted up to 5 complete turns.

BODY

Carbon fiber body.



* Setups / ** Cup style

WA9720*/**

RRP £370.00 + VAT

IDEAL FOR SOLVENT AND WATERBORNE BASE COAT.

HTE by Walcom®, more than 20 years of experience with the most popular technology in the market, the paint system that combines adequate atomizing pressure and high transferred efficiency, certified by international independent laboratory and research institutes.

The specific base air cap HP-High paint layout with proper distribution and flow orientation, 12 holes nozzle, precise and wide range of adjustment for fan and paint flow, are details that makes it a unique piece of equipment in the refinish application of the latest generation products.

Key Features:

- High atomization and product lay out,
- Low air consumption (350 l/min),
- Certified transfer efficiency over 70%,
- Nozzle with special diffuser for air flow homogeneity,
- Easy to adjust and versatility,
- Ergonomic handle and lever,
- Carbon fibre for lightness and corrosion resistance,
- 360 g weight, the lightest on the market.
- Setups available: 1.0, 1.2, 1.3, 1.4, 1.7, 1.9

SUITCASE

Rigid plastic suitcase includes:

- Spray gun
 - Service kit
 - Cleaning brush
 - Spanner
 - Lubricant
 - Paint filters
- (Electronic gauge sold separately)



Genesi Carbonio 360

HTE Clear



CUPS AVAILABLE

- Black UV (as standard)
- White
- Aluminium

NOZZLE
Ultra lightweight aircap made from carbon fibre.

FAN PATTERN CONTROL
Completely open.

MATERIAL FLOW CONTROL
3 -3.5 turns backward from close for clear MS HS- UHS and acrylics, it may need to be adjusted based on temperature, humidity and painter speed. The material flow is very precise and can be adjusted up to 5 complete turns.

BODY
Carbon fiber body.

* Setups / **Cup style

WA9620*/**

RRP £370.00 + VAT

IDEAL FOR CLEAR CLOAT APPLICATION MS-HS UHS ACRYLICS.

A new specific version for improved transfer efficiency and more quality results, HTE clear with the HA-high atomization air cap that allows to achieve exceptional results, an amazing fan pattern and a perfect and even paint distribution with really low orange peel effect.

The wide and precise range on the paint control regulation allow each painter to find the best setting for his personal spraying style.

Key Features:

- High atomization and product lay out,
- Low air consumption (380 l/min),
- Certified transfer efficiency over 70%,
- Nozzle with special diffuser for air flow homogeneity,
- Easy to adjust and versatility,
- Ergonomic handle and trigger,
- Carbon fiber for lightness and corrosion resistance,
- 360 g weight, the lightest on the market.
- Setups available: 1.0, 1.2, 1.3, 1.4, 1.7, 1.9

SUITCASE

Rigid plastic suitcase includes:

- Spray gun
 - Service kit
 - Cleaning brush
 - Spanner
 - Lubricant
 - Paint filters
- (Electronic gauge sold separately)



Slim KOMBAT



UV cup as standard for 1.0 and 1.7 HTE Primer models.

CUPS AVAILABLE

- Black UV
- White
- Aluminium



AIR CAP

Ultra lightweight carbon Kevlar with Aluminium inner

FAN PATTERN CONTROL

Completely open for ideal paint atomization.

BODY

Made from carbon Kevlar and magnesium for great durability and maximum weight reduction.

* Setups / **Cup style

WA8020*/**

RRP £185.00 +VAT

IDEAL FOR PRIMERS AND FINISHES IN BODYSHOPS AND INDUSTRIAL PAINTING

Slim KOMBAT breaks the production mould, abandons the classic aluminium body and presents itself with an innovative magnesium body, injected with Kevlar® fiber (PAT. PENDING). The lightness of magnesium, combined with the compactness and strength of Kevlar®, give life to a spray gun weighing only 380g, also improved in performance, thanks to the new bodies and more powerful and concentrated air flows that allow better product atomization. The characteristics of Kevlar® make this spray gun absolutely resistant to the aggressions of any type of solvent and pickling agent.

The surface characteristics also make it extremely easy to clean.

Slim KOMBAT is therefore added to the traditional Slim and is available in 3 versions: HVL, HTE, HTE SR, which share the same air consumption (220-260 l/min), high transfer efficiency (over 80% for primers and 70% for bases and clear) and for the quality in product distribution and atomization.

- Set ups available: 1.0 UV Primer, 1.3 Base and Clear, 1.5 Wet on Wet, 1.7/1.9 High Build Primer, 2.2/2.5 Polyester Spray Filler

SUITCASE

Rigid plastic suitcase includes: spraygun, rebuild kit (spring, seals, air valve), cup, wrench tool, mineral lube oil, instruction manual and warranty.



EGO HTE



SETUPS
0.5, 0.7, 1.0, 1.2, 1.4

FAN PATTERN CONTROL
Completely open for ideal paint atomization.

AIR ADJUSTMENT
Completely open for total air flow.

BODY
High grade aluminium

AIR INLET PRESSURE GAUGE
Premium quality with shock protector.

* Setups

WA10090/*

RRP £170.00 +VAT

FOR SPOT REPAIR AND PROFESSIONAL DECOR.

EGO HTE the cutting edge technology for a mini gun, unbelievable performance in the higher transfer efficiency version, ideal solution for base coats and clear coats, HS and UHS. The reduced air consumption (less than 180 l/min), high transfer efficiency (over 80%) as well as the high atomizing cap and quality of each single component make this spray gun a bodywork treasure, combining practicality and manageability with quality and high class finish.

- Setup available 0.5, 0.7, 1.0, 1.2, 1.4
- UV cups available for this model

SUITCASE

Rigid plastic suitcase includes:

- Gauge
- Spray gun
- Medium cup 180cc
- Small cup 75cc
- Lubricant
- Paint filters
- Service kit



Spraygun Accessories

TOP REGULATOR WITH GAUGE COVER

High flow and precision regulator with glass pressure gauge and metallic case to be applied to the spray gun air inlet products.

Key Features:

- Body: CNC processed anodised aluminium
- Gauge: range 0 - 10 bar
- Air inlet: 1/4" U compatible with various standard 1/4"
- Package: 1 pcs
- Weight: 140 g



WA90147/W

RRP £36.95 +VAT

CARBON FIBER AIR REGULATOR

Air pressure regulator, high flow and precise, carbon fibre housing and 1/4" swivelling connection.

Key Features:

- Body: carbon fibre
- Air inlet: 1/4" swivelling, compatible with different 1/4 standard version
- Package: 1 pcs
- Weight: 77 g



WA90184/W

RRP £71.65 +VAT

DIGITAL CARBON FIBER GAUGE DGT

Digital gauge high precision, carbon fibre housing.

Key Features:

- EJS system (easy joint system) automatic coupler, practical and fast manometer connection and disconnection.
- Range: 0 - 12 bar (can be easily changed to psi)
- Package: 1 pcs.
- Weight: 41 g



WA90181/W

RRP £56.65 +VAT

CARBON FIBER AIR REGULATOR DGT

Pressure regulator with precise high flow valve, carbon fibre housing and 1/4 swivelling connection. Digital gauge with carbon fibre housing.

Key Features:

- Body: carbon fibre
- Gauge: digital high precision, carbon fibre housing
- Range: 0 - 12 bar (can be easily changed to psi)
- Air inlet: 1/4" U swivelling, compatible with different 1/4 standard version
- EJS system (easy joint system) automatic coupler, practical and fast manomete connection and disconnection
- Package: 1 pcs
- Weight: 118 g



WA90183/W

RRP £123.30 +VAT



THERMODRY TECHNOLOGY

Walcom[®]

←
OPEN



Walcom[®]
... TECHNOLOGY

Spraygun CLEANERS

FLOW CHANNELS

Ecological and efficient, they work with the Venturi and gravity systems.

EXHAUST HOOD

This guarantees the absence of solvent and other fumes, additionally protecting the operator's health.

WORK SURFACE

Ample and secure, it provides for efficient and fast work.



The EASY series spray gun cleaners are used to manually clean spray guns and are the best and most convenient solution for those who want to create an area dedicated to spray gun cleaning. Practical, essential and complete, the EASY gun cleaners are available in the *IS* versions for solvent paints and *IW* versions for water-based paints.

Spraygun cleaner EASY, it allows a proper cleaning and maintenance of your spraygun, really practical and safe, it helps to maintain your spraygun properly and ecofriendly. The powerful thinner atomizer (water atomizer in the *IW* version), combines with proper operation, allow for the best results in spraygun clean and maintenance.

Always use protective gloves during cleaning



BLOW GUN

To assist the operator in the spray gun cleaning phases.

Spraygun CLEANERS

EASY/S

Spray gun cleaner for solvent paints.

For more accurate spray gun cleaning in three phases:

- 1) atomized clean solvent flow
- 2) clean solvent flow
- 3) recycled solvent flow

- Structure: zinc sheet
- Dimension of washing tank: L 62 x P 40 x H 50 cm
- Total dimensions cm: L 62 x P 40 x H 140 cm
- Operating air pressure: 4.0-6.0 bar
- Air consumption: 65 l/min.
- Package: 1 pcs
- Weight: 38 Kg



WA90061

RRP £615.00 +VAT

EASY/W

Manual gun cleaner suited for water-based paints.

For more accurate spray gun cleaning in three phases:

- 1) atomized clean water flow
- 2) clean water flow
- 3) recycled water flow

- Structure: stainless steel
- Cleaning tank: stainless steel
- Dimension of washing tank: L 55 x P 33 x H 20 cm
- Total dimensions cm: L 68 x P 41 x H 140 cm
- PA/6 cleaning assistant blow gun
- Operating air pressure: 4.0-6.0 bar
- Air consumption: 65 l/min.
- Package: 1 pcs
- Weight: 43 Kg



WA90062

RRP £1,650.00 +VAT

Blow GUNS



PROGRESSIVE VALVE

The distinguishing element in our blow guns, they accurately and reliably dose the amount of air to be used.

INNOVATIVE

Innovative and captivating materials like the transparent nylon that identifies this full "vision" gun.

SOFT-TOUCH BODY

Nickel-plated body with soft-touch rubber overprinting for a sure and comfortable grip. One of a kind, the PA/6 represents Asturomec's future.

PA/6

Various models available to meet the professionals specific needs. A gun that represents our brand and reliability.

Designed and constructed for professional use, they are divided into 4 macro groups: PROFI series, PA/4N series, SOFT series and the new, captivating and modern PA/6 series.

Always functional and reliable, they now also meet the more demanding customer's needs with versions enhanced by the modern and innovative design.

The new PA/6 is a demonstration, combining functional quality with a unique design made possible by the grip's soft-touch rubber overprinting.

The wide range of available nozzles make Asturomec® blow guns flexible and suited for more specific use. The entire series is equipped with progressive distribution valve.

PA/4N

Budget blow gun while still maintaining the build quality, with progressive flow delivery valve.

Body: nylon
Nozzle: short
Operating air pressure: 1.0 - 6.0 bar
Package: 10 pcs
Weight: 1.9 Kg



WAPA4/N

RRP £4.45 +VAT

PA/6

Blow gun with progressive flow delivery valve.

Body: polished and nickel-plated metal with soft-touch rubber overprinting
Nozzle: short
Operating air pressure: 1.0 - 6.0 bar
Package: 10 pcs
Weight: 2.38 Kg



WAPA/6

RRP £7.50 +VAT

PA/6CV

Blow gun with Venturi style effect to increase air volume, including progressive flow delivery valve.

Body: polished and nickel-plated metal with soft-touch rubber overprinting
Nozzle: Venturi, for increasing the outlet air volume
Operating air pressure: 1.0 - 6.0 bar
Package: 1 pcs
Weight: 271 g



WAPA/6CV

RRP £20.95 +VAT

TS/N

Gun for applying single component soundproofing protective compounds pre-mixed including polyurethane-based compounds or loose. Disposable quick connect nozzle for quickly changing colours.

Body: nylon
Featuring: 60 cm. long extension tube with special nozzle for spraying in box sections
Nozzle: interior in steel-external in hostaform C®
Connector with European thread
Operating air pressure: 2.0 - 5.0 bar
Package: 1 pcs
Weight: 290 g



WA50247

RRP £14.60 +VAT

NOZZLE


Hostaform C® connection with adjustable nozzle. Spare part for TS/N
Package: 1 pcs
Weight: 30 g



WA0920901

RRP £2.25 +VAT

AIR BLOWER PRO-FANJET

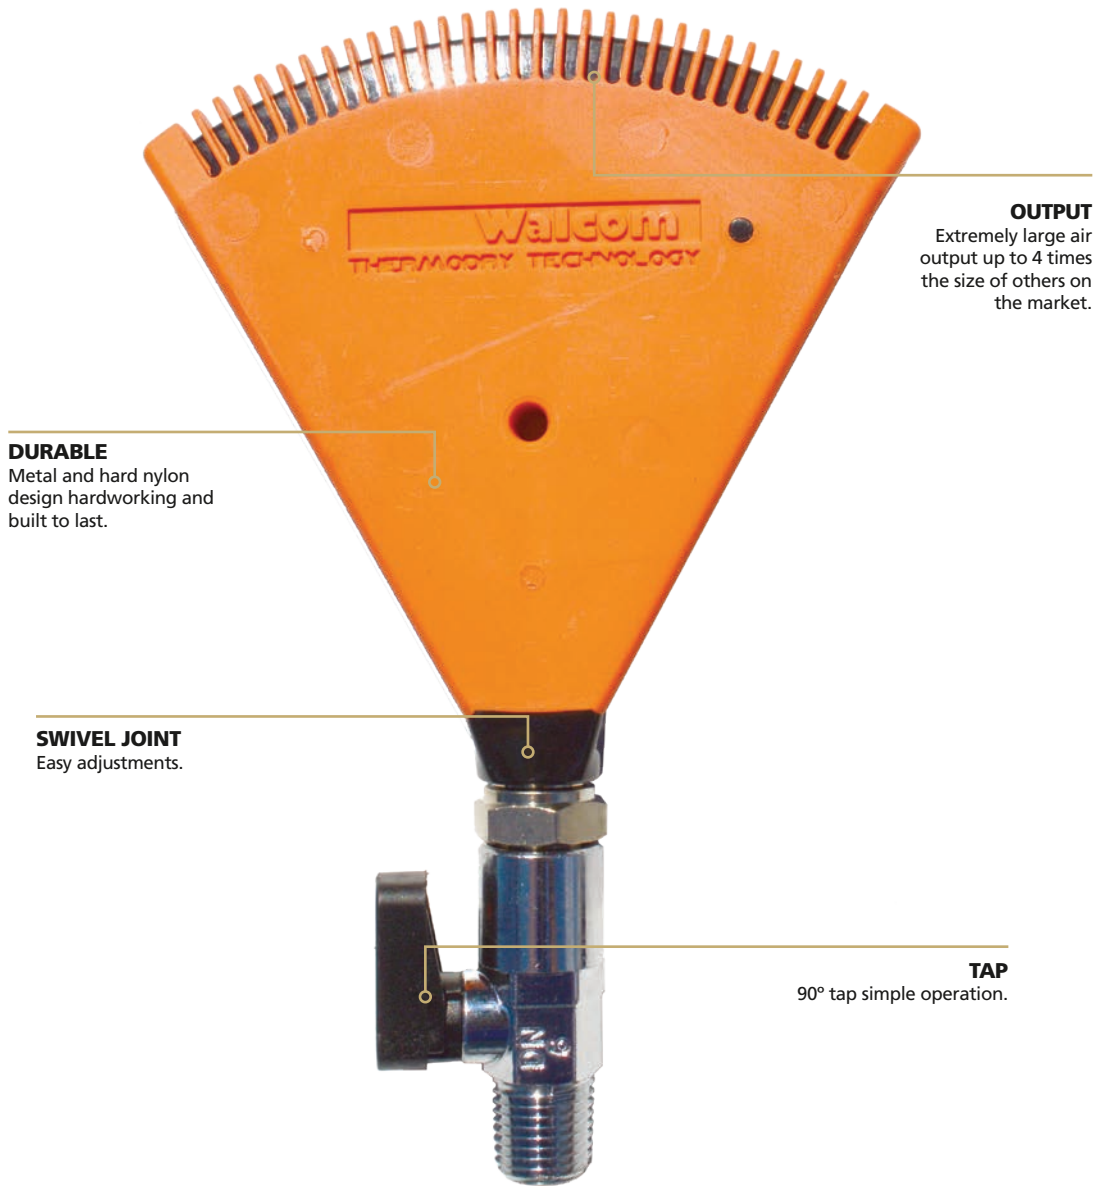

DURABLE
Metal and hard nylon
design hardworking and
built to last.

SWIVEL JOINT
Easy adjustments.

OUTPUT
Extremely large air
output up to 4 times
the size of others on
the market.

TAP
90° tap simple operation.

The Air blower lines include the range of quick water-based paint drying guns and systems.

Air blower, exploiting the Venturi system, can increase the emitted air volume by about 15 times, thus significantly reducing drying time.

The enormous generated volume of air, in fact, associated with heat taken from the paint booth (20% mains air, 80% recycled air), allows for the fast evaporation of water residue.

The range now also includes a LIGHT version made of insulating antistatic thermoplastic material for lightweight and heatproof work.

IMPORTANT: work with perfectly filtered air to avoid the infiltration of impurities that could compromise finish quality.

ECODRY LIGHT

Super light nylon blower to dry waterborne paint, adjustable flow - volume. Venturi affect to increase air volume.

Body: nylon

Blow distance: 40-50 cm from the surface, continuously moving the gun

Operating air pressure: 0.5-2.0 bar

Air consumption: 200-300 l/min.

Package: 1 pcs

Weight: 390 g



WA60143

RRP £79.50 +VAT

AIR BLOWER PRO

Continuous flow drying gun 70°C for basecoat, equipped with air regulator.

40-50 cm blow distance in the first phase;
- 10-20 cm in final drying.

Body: metallic

Nozzle: nylon and rubber radial

Air consumption: 265 l/min to 3 bar

Weight: 300 g



WA60150

RRP £39.60 +VAT

Filter **SERIES**




AIR PASSAGES
3/4" air passages with 1200 l/min capacity. Possibility of working with 2 spray guns.

BAR
CNC processed extruded and anodised aluminium bar and pipes.

PRESSURE REGULATIONS
High precision pressure regulator with pressure gauge.

SATURATION INDICATORS
Silica gel saturation indicators (FSRD 4 - FSRD 3 - ESR versions).

EXAMPLE OF THE AIR PIPING IN THE BODY SHOP

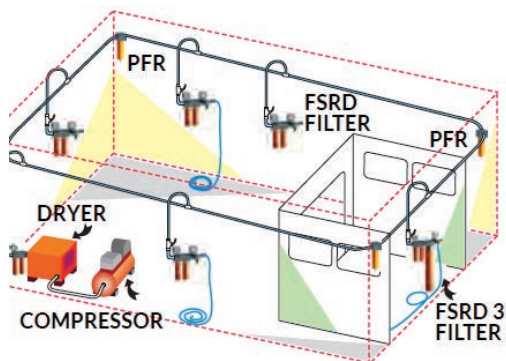

DISCHARGE
Automatic for water and manual for oil.

Walcom® series filter groups represent the maximum expression of quality in terms of compressed air treatment in bodyworks.

Line, drop line, paint booth: perfectly clean and filtered air is a must, and for this reason Walcom® has created a complete range of single and combined filter groups, able to fully eliminate all water, oil, dust and humidity residue from mains air, generating breathable air thanks to the active carbon filter.

The new /11 series combines a restyled look with higher efficiency which, thanks to the new air passage designs, guarantees 1200 l/min air flow, allowing for efficient bodyworks with even 2 spray guns.

TD3 PRO - TD1 PRO

NEW SOFTWARE

The Tech Pro version efficiently manages TD operations, controlling any system faults.



THT PRO

New high performance and efficient hose with 1200 W power.

DOUBLED AIR FLOW

The 1200 l/min air flow lets you use 2 spray guns in full efficiency.

DRAIN SYSTEM

Automatic for water with safety rod for any clogs, manual for oil.




**REQUEST
A DEMO
£POA**

The new TD3 and TD1 multifunctional heat conditioner "PRO" line responds to user's suggestions, significantly contributing to the development of this new TD series.

In fact, experience is the foundation of each product and its success, and what better advice can contribute to perfecting a tool than that from people who use it every day?

Walcom®, always attentive to these market inputs, has translated all this into a new and efficient TD "PRO" series, with the following improvements:

- The new Tech Pro software, able to efficiently control tool operations, offers the operator the possibility of working in full safety and efficiency;
- Doubled air flow (over 1.200 l/min) for fully efficient operations even with two spray guns;
- The new THT hose's doubled heating power, 1.200 W, grants higher reactivity in reaching and maintaining set temperatures, with the consequent practically total reduction of operator wait time;
- The new automatic condensation drain system, for higher cleaning and tool maintenance security. New and important features that further enhance this exceptional tool that has stood out as the most efficient and complete on the market.

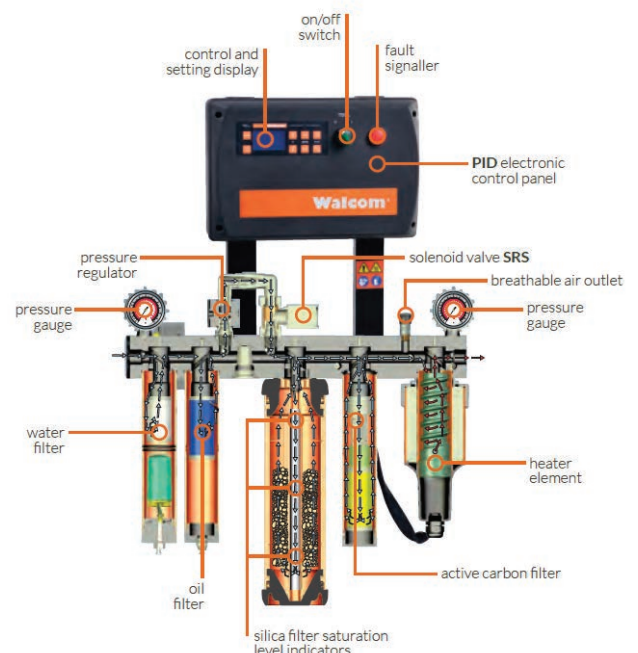

FSRD

Air treatment system excellent for use in car-body workshops and industry.

- Central body: anodized aluminium
- Composition: 1) Pre-filtering element in synthetic fibre for the elimination of condensation. Automatic discharge.
2) Oil-separating filter for the elimination of residual pollutants. Manual drainage tap.
- Pressure adjuster: membrane system and automatic decompression
- Air inlet: F 3/4"; air outlet: n° 2 from M 1/4"
- Filtering power: air 5 µ - oil 0.01 µ
- Operating air pressure: 12 bar
- Air consumption: 1200 l/min. to 6 bar
- Weight: 4.7 Kg



WA60121/11

RRP £441.00 +VAT

FSRD 2

A modular filter system ideal for use in the painting booth.

- Central body: anodized aluminium
- Composition: 1) Pre-filtering element in synthetic fibre for the elimination of condensation. Automatic discharge.
2) Oil-separating filter for the elimination of residual pollutants. Manual drainage tap.
3) Active carbon filter to eliminate all impurities and obtain breathable air. Max oil residue < 0.0003 mg/m3.
- Pressure adjuster: membrane system and automatic decompression
- Air inlet: F 3/4"; air outlet: n° 2 from M 1/4"
- Filtering power: air 5 µ - oil 0.01 µ
- Operating air pressure: 12 bar
- Air consumption: 1200 l/min. to 6 bar
- Weight: 7 Kg



WA60145/11

RRP £776.50 +VAT

FSRD 3

A modular filter system ideal for use in the painting booth.

- Central body: anodized aluminium
- Composition: 1) Pre-filtering element in synthetic fibre for the elimination of condensation. Automatic discharge.
2) Oil-separating filter for the elimination of residual pollutants. Manual drainage tap.
3) Silica dryer group to reduce residual humidity in the compressed air. Nr. 3 saturation indicator lights.
4) Filter to eliminate dust generated by silica, 5 µ filtering capacity.
- Pressure adjuster: membrane system and automatic decompression
- Air inlet: F 3/4"; air outlet: n° 2 from M 1/4"
- Filtering power: air 5 µ - oil 0.01 µ
- Operating air pressure: 12 bar
- Air consumption: 1200 l/min. to 6 bar
- Weight: 11 Kg



WA60123/11

RRP £834.00 +VAT

FSRD 4

A modular filter system ideal for use in the painting booth.

- Central body: anodized aluminium
- Composition: 1) Pre-filtering element in synthetic fibre for the elimination of condensation. Automatic discharge.
2) Oil-separating filter for the elimination of residual pollutants. Manual drainage tap.
3) Silica dryer group to reduce residual humidity in the compressed air. Nr. 3 saturation indicator lights.
4) Active carbon filter to eliminate all impurities and obtain breathable air. Max oil residue < 0.0003 mg/m3.
 - Pressure adjuster: membrane system and automatic decompression
 - Air inlet: F 3/4"; air outlet: n° 2 from M 1/4"
 - Filtering power: air 5 µ - oil 0.01 µ
 - Operating air pressure: 12 bar
 - Air consumption: 1200 l/min. to 6 bar
 - Weight: 11 Kg



WA60138/11


RRP £1,190.95 +VAT

COUPLINGS & PLUGS

Walcom® X300 quick release airline connectors are premium quality couplings and plugs designed to give a smooth and effortless operation of connectivity and detaching the couplings.

X300 - MALE

Thread 1/4"

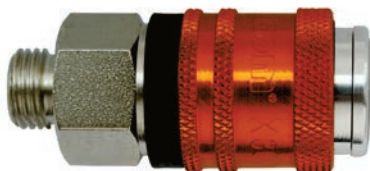


WA10251

RRP £6.50 +VAT

X300 - FEMALE

Thread 1/4"

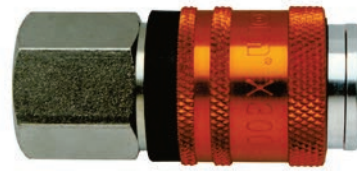

WA10261

RRP £6.50 +VAT

X300 - WITH REST

Internal diameter 10 mm



WA10273

RRP £6.50 +VAT

X300 - D MALE PLUG

Thread 1/4"




WA11041

RRP £3.00 +VAT

X300 - D FEMALE PLUG

Thread 1/4"

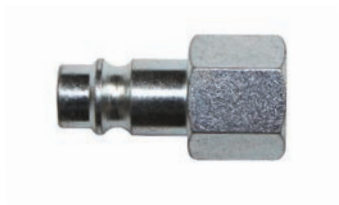

WA11141

RRP £3.00 +VAT

FIXED FEMALE WITH REST FOR EVERY TYPE OF HOSE

Thread 1/4"
ø int. hose 9-10mm




WA13265

RRP £3.00 +VAT

STEEL PLUGS ONLY FOR X300U AND X300 WITH REST

ø int. 10mm

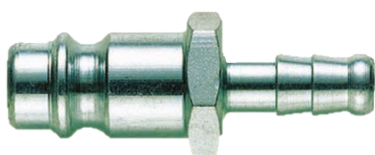

WA11322

RRP £3.00 +VAT

ULTRA LIGHTWEIGHT ALUMINIUM PPS™ ADAPTER FOR THE DISPOSABLE CUP SYSTEMS



WA52062 3M SLIM-EGO - TYPE "D"	RRP £16.95 +VAT
WA52059 3M IWATA -TYPE "A" (W400 WS400 LPH)	RRP £16.95 +VAT
WA52061 3M DEVILBISS TYPE "C"	RRP £16.95 +VAT
WA52060 3M IWATA S -TYPE "B" (Pininfarina)	RRP £16.95 +VAT
WA52058 for Walcom Carbonio	RRP £16.95 +VAT

Walcom[®]

SPRAYGUNS



+44 (0)1302 571 571 | sales@flpgroup.co.uk | www.flpgroup.co.uk

FLP Group, Clayfield Industrial Estate, Doncaster, DN4 8QG, UK

We're Social



Search FLP Group